



Catalog Number	
Project	Type

FEATURES & SPECIFICATIONS

APPLICATION — The CLG Canopy light was designed as a high performance canopy light for high traffic areas. The rugged construction and precision optical system makes this fixture ideal for parking garages or other high traffic areas.

CONSTRUCTION — The housing is constructed of die cast aluminum. The vandal resistant patterned clear polycarbonate lens is gasketed to provide for weather tight protection. ETL listed.

FINISH — A Super Durable Polyester powder coat finish is electrostatically applied in our state of the art paint facility. Standard colors available: Black, Bronze, US Green, White. Custom colors available upon request.


OPTICAL SYSTEM — Multi-patterned, clear acrylic lens. Impact resistant and UV stabilized to prevent yellowing. Segmented specular reflector. Internal "light separator" band works with the refractive patterns on the lens to create distinct areas of up light and down light and reduces the amount of light in the direct line of sight for pedestrians and automobiles.

ELECTRICAL SYSTEM — Available in 70W thru 175W standard metal halide, pulse-start metal halide, and high pressure sodium. Comes standard with a 4KV pulse rated mogul base socket. Each 60HZ CWA multi-tap¹ or 480V ballast is pre-wired and installed for convenience.

MOUNTING — Housing is equipped with two side conduit entries and one top conduit entry. A mounting plate is provided for direct mounting to a standard 4" junction box.



Garage Canopy CLG SERIES

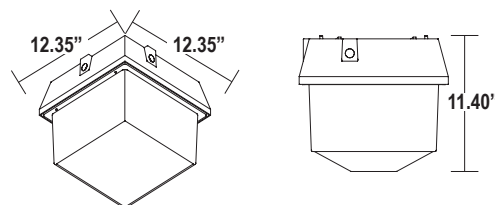

Series	Housing Height	Length & Width
CLG	11.40"	12.35" x 12.35"

ORDERING INFORMATION

Choose the bold face options for the appropriate luminaire configuration for your application and enter on the line above each fixture attribute. Accessories may be factory installed, depending on the particular accessory chosen, but still be ordered as a separate line item.

Example: **CLG5A1-BZ**

CLG		-		-	
Series	Wattage/Source	Voltage	Pulse-Start	Finish	
CLG	2A 70W PS Metal Halide	1 Multi-Tap ¹	PS Pulse-Start	BK Black	
	2B 70W High Pressure Sodium	2 480V		BZ Bronze	
	3A 100W PS Metal Halide			GR OD Green	
	3B 100W High Pressure Sodium			USG US Green	
	4A 150W PS Metal Halide			WH White	
	4B 150W High Pressure Sodium			SP Special ³	
	5A 175W Metal Halide				
	12A 42W Fluorescent 120V ²				

NOTES

- 1 Multi-Tap is 120/208/240/277V wired 277V.
- 2 42W Fluorescent model is only available in 120V. Order using the "1" voltage designation.
- 3 Custom RAL color matching is available. Contact your Techlight sales representative for additional information.