



Catalog Number	
Project	Type

Features & Specifications

Application

The E97V Surface Mount Luminaire is a classically styled fixture fit for any interior. They are designed to be surface mounted. This fixture is ideal for offices, libraries, schools, etc.

Features

The fixture is a direct light fixture. The fixture is ideal for direct general illumination with no glare and an aesthetically pleasing housing. Provided with a ribbed acrylic lens.

Construction

The housing is constructed of rigid extruded aluminum to provide a light weight load to ceilings. Fixtures can be individually mounted or installed in a continuous row.

Electrical System


120/277 volt, 50/60 Hz. 480/347 volt available upon request. Comes standard with instant start electronic ballast for T8 applications.

Finish


Post painted housing and components with a Lighting White Polyester type paint which has a UV stabilizer included with a 93% reflectivity. Raw steel goes through our custom wash system with a mild solvent and pre treatment "rust inhibitor" before passing through a preheat oven. After the paint is applied the fixture then passes through the cure oven for maximum adhesion. Each fixture is painted to a minimum of 2-3 mil thickness for extra durability.

ECLIPSE SERIES

E97V SURFACE MOUNT LUMINAIRE

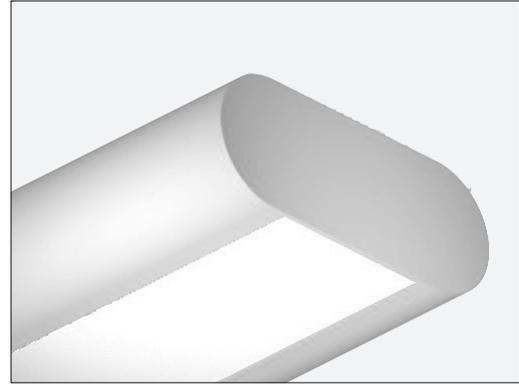

DIMENSIONS

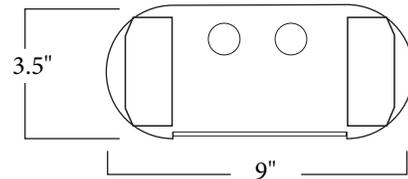

Please contact your Horizon Sales Representative for more information.

All dimensions subject to change without notice.

Ordering Nomenclature

Ex: (E97V Surface, 2 Lamp, F32T8, White Finish, Lens, Stand-Alone Unit, Multi-Volt = E97V232D)

--	--	--	--	--	--	--	--

SERIES	NUMBER OF LAMPS PER CROSS SECTION	WATTAGE/TYPE	FIXTURE COLOR	VOLTAGE	BALLAST FACTOR	FIXTURE TYPE	OPTIONS
E97V	2	14 - 14W T5, 22"	BLANK - White	D - Multi-Volt	BLANK - Normal	BLANK - Stand Alone Unit	P - Program Start
		17 - 17W T8, 24"		1 - 120V	H - High	ER - End of Run	EB5 - 500 Lumen Emergency Ballast
		24 - 24W T5ho, 22"	T - Titanium	2 - 277V	L - Low	BR - Beginning of run	EB7 - 700 Lumen Emergency Ballast
		28T5 - 28W T5, 46"	B - Black	3 - 347V		BR - Intermediate	EB14 - 1400 Lumen Emergency Ballast
		28T8 - 28W T8, 48"	SP - Special	4 - 480V			EB30 - 3000 Lumen Emergency Ballast
		32 - 32W T8, 48"					FBF - Fast-Blow Fuse
		48HO - 60W 800mA, 48"		*Multi-Volt is 120/277V			SBF - Slow-Blow Fuse
		54 - 54W T5HO, 46"					WH34 - Wiring Harness 3-Wire 4-Foot
							WH44 - Wiring Harness 4-Wire 4-Foot
							WH54 - Wiring Harness 5-Wire 4-Foot
							WH38 - Wiring Harness 3-Wire 8-Foot
							WH48 - Wiring Harness 4-Wire 8-Foot
							WH58 - Wiring Harness 5-Wire 8-Foot

ROW LENGTH INFORMATION

To aid in determining the correct bill of material for your order. Please list the row length on the purchase order as such:

Row Length = 16 feet


For multiple rows please list out the individual row lengths for each row as such:

Row 1 = 16 feet

Row 2 = 20 feet



ECLIPSE SERIES
E97V SURFACE MOUNT LUMINAIRE

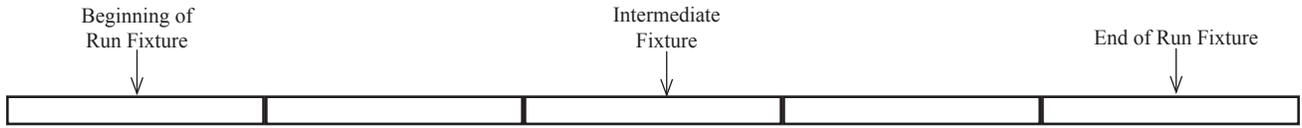

Typical Row Configurations

	Row Length	2'	4'	6'	8'	10'	12'	14'	16'	18'	20'	22'	24'	26'	28'	30'	32'	34'	36'	38'	40'	42'	44'	46'	48'
Fixture Length	2'	1		1		1		1		1		1		1		1		1		1		1		1	
	4'		1	1			1	1			1	1			1	1			1	1			1	1	
	8'				1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5	5	6