



Catalog Number	
Project	Type

FEATURES & SPECIFICATIONS

APPLICATION — The knock down strip is an excellent choice for retail and residential applications. Perfect for shallow coves, showcases, displays and task lighting.

FEATURES — Uses the latest technology for T5 ballasts and lamps. Uses efficient T5 lamps of HO lamps for up to 70% more light output.. Premium housing crimped along sides for extra rigidity and straight alignment. Features pressure lock lamp holders. Accepts optional plug-in wiring feature for continuous row installation. Alignment couplers furnished for continuous row installation. Can be surface or pendant mounted, individual or in rows. Numerous KO's for easy installation. Allows for 1, 2 and 3 lamp configurations. Range of lamp lengths for greatest design flexibility.

CONSTRUCTION — Fixture housing, lamp holder brackets, end sections and channel cover constructed of heavy gauge die-formed steel.


ELECTRICAL SYSTEM — ETL listed. Suitable for damp locations. Damp location emergency pack must be specified separately. Ballasts are solid-state electronic. Ballasts and lamp holders are replaceable without removing from ceiling. Discrete voltage must be specified for emergency pack options when wired with flex.

FINISH — All reflective surfaces are finished with a high reflectance, lighting fixture white polyester powder.




T5 Low Profile Knock Down STRIP

KDT5 SERIES



Lamp Positions

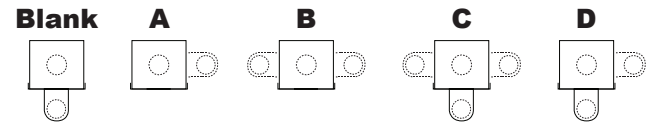

Series	Width & Height (body only)
KDT5	1-5/8" x 1-3/8"

ORDERING INFORMATION

Choose the bold face options for the appropriate luminaire configuration for your application and enter on the line above each fixture attribute. Accessories may be factory installed, depending on the particular accessory chosen, but still be ordered as a separate line item.

Example: **KDT5354CD**

KDT5									
Series	Lamps	Wattage		Lamp Position	Voltage	Ballast Factor			
KDT5	1	14	14W T5, 22"	Blank	D	Multi-Volt ¹	Blank	Normal	
	2	21	21W, T5, 34"	A			H	High)	
	3	24	24W T5HO, 22"	B			L	Low	
		28T5	28W T5, 46"	C					
		39	39W, T5HO, 34"	D					
		54	54W T5HO, 46"						

Options (Order as separate line items)


P	Program Start	C3	10' Cord w/277V Nema Plug 16/3 20A	KDTSEL	Elliptical Reflector
20	≤20% THD	C4	6' Cord w/480V Nema Plug 16/3 20A	KDT5OL	Opal Lens (per linear foot)
FBF	Fast Blow Fuse	WH34	Wiring Harness 3-Wire 4-Foot		
SBF	Slow Blow Fuse	WH44	Wiring Harness 4-Wire 4-Foot		
AC63	6', 3/8" dia., Armored Flex Cable	WH54	Wiring Harness 5-Wire 4-Foot		
SJ6	6', 3/8" dia., 16/3 SJ Cord	10JC	(3)S Hooks and 10' Jack Chain Set		
SJ10	10', 3/8" dia., 16/3 SJ Cord	G10	10' Aircraft Cable w/ 12" Arms (2)		
SJ15	15', 3/8" dia., 16/3 SJ Cord	G15	15' Aircraft Cable w/ 12" Arms (2)		
WOC	120/347 Volt Sensor	G20	20' Aircraft Cable w/ 12" Arms (2)		
WOC1	480 Volt Sensor	KDT5S	Symmetrical Reflector		
C1	6' Cord w/120V Nema Plug 16/3 15A	KDT5AS	Asymmetrical Reflector		
C2	6' Cord w/277V Nema Plug 16/3 15A	KDT5IAS	Inside Asymmetrical Reflector		

NOTES
1 Multi-Volt is 120/277V.


KDT5 T5 Low Profile Knock Down Strip

OPTIONAL REFLECTORS


KDT5S
Symmetrical Reflector



KDT5AS
Asymmetrical Reflector



NKDIAS
Inside Asymmetrical Reflector



KDT5EL
Elliptical Reflector

