



**TECHLIGHT**

# LPF and LMPF


*120V LED POWER FLOOD AND  
LED MICRO POWER FLOOD  
LUMINAIRES*

## COLOSSAL PERFORMANCE CAN COME IN A MODEST PACKAGE

Techlight's high output 120V LED Power Floods and Micro Power Floods were painstakingly designed to produce vast amounts of energy efficient light without costing vast amounts of money. Their sleek, compact design allows you to seamlessly accent landscape or facade features without the intrusion of bulky expensive light fixtures.

The unique heat dissipating die cast housing design keeps the LED's operating at maximum efficiency and extends their lives exponentially longer than traditional light sources. Multiple lenses and shielding options are available for complete control of the application of light and the reduction of light pollution.

Using Techlight's proprietary E-Coat protective undercoating and super durable powdercoat paint finishing process, the LED Power Flood and Micro Power Flood will provide years of reliable service in the field. Each fixture is backed by our 3-Year Limited Warranty.

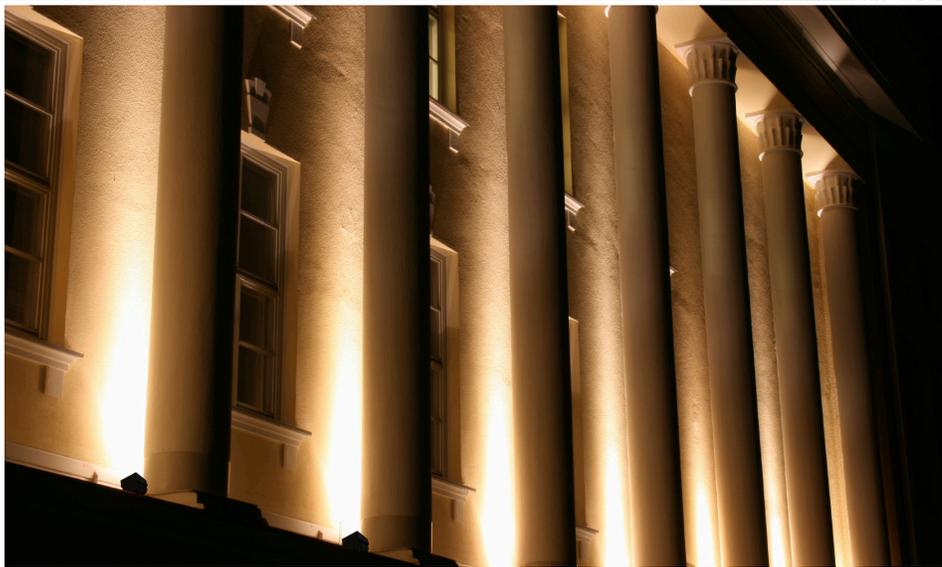

LPF shown with optional S200 shield and LMPF shown with optional S205 shield.



# PERFORMANCE DATA

## LPF LED POWER FLOOD

# of LEDs	Delivered Lumens	System Wattage	Voltage
8	3000	44W	120V

## LMPF LED MICRO POWER FLOOD

# of LEDs	Delivered Lumens	System Wattage	Voltage
2	770	11W	120V

# ORDERING INFORMATION

Choose the bold face options for the appropriate luminaire configuration for your application and enter on the line above each fixture attribute. Accessories may be factory installed, depending on the particular accessory chosen, but still be ordered as a separate line item.

EXAMPLE: **LPF CW 8 TNS -BZ**

### **SERIES**

**LPF** LED Power Flood Luminaire

### **COLOR TEMPERATURE**

**CW** Cool White (5500K)  
**NW** Neutral White (4000K)  
**WW** Warm White (3000K)  
 (See performance data for Delivered Lumens)

### **NUMBER OF LED'S**

**8** 8 LED

### **OPTICS**

**TNS** Narrow Spot (NEMA 2x2)  
**TNF** Narrow Flood (NEMA 5x5)  
**TWF** Wide Flood (NEMA 7x7)

### **FINISH**

**BK** Black  
**BZ** Bronze  
**GR** OD Green  
**WH** White  
**SP** Special

### **ACCESSORIES** (Ordered Separately)

**BSP3-120-LC2** 120V Surge Protector  
**B01** Tree Base  
**B03** 4" Round 3 Hole Cover  
**P4025D** 2-3/8" OD Tenon Mount Adaptor  
**B16-12** Palm Tree Base with 12' Strap  
**TLSBBJB** Brass Junction Box  
**SMSB** 12" x 1" Mounting Stake  
**MMSB** 18" x 1" Mounting Stake  
**LMSB** 20" x 2.5" Mounting Stake  
**TLHB800RCH** Digital Timer  
**PSJ163** 16 Gauge 3 Strand Lead Wire  
**S200** 2-Piece Adjustable Shield  
**S201** Three Sided Debris Free Shield  
**S202** Four Sided Debris Free Shield

Choose the bold face options for the appropriate luminaire configuration for your application and enter on the line above each fixture attribute. Accessories may be factory installed, depending on the particular accessory chosen, but still be ordered as a separate line item.

EXAMPLE: **LMPF WW 2 TF -BZ**

### **SERIES**

**LMPF** LED Micro Power Flood Luminaire

### **COLOR TEMPERATURE**

**CW** Cool White (5500K)  
**NW** Neutral White (4000K)  
**WW** Warm White (3000K)  
 (See performance data for Delivered Lumens)

### **NUMBER OF LED'S**

**2** 2 LED

### **OPTICS**

**TF** Facade

### **FINISH**

**BK** Black  
**BZ** Bronze  
**GR** OD Green  
**WH** White  
**SP** Special

### **ACCESSORIES** (Ordered Separately)

**BSP3-120-LC2** 120V Surge Protector  
**B01** Tree Base  
**B03** 4" Round 3 Hole Cover  
**P4025D** 2-3/8" OD Tenon Mount Adaptor  
**B16-12** Palm Tree Base with 12' Strap  
**TLSBBJB** Brass Junction Box  
**SMSB** 12" x 1" Mounting Stake  
**MMSB** 18" x 1" Mounting Stake  
**LMSB** 20" x 2.5" Mounting Stake  
**TLHB800RCH** Digital Timer  
**PSJ163** 16 Gauge 3 Strand Lead Wire  
**S203** 2-Piece Adjustable Shield  
**S204** Three Sided Debris Free Shield  
**S205** Four Sided Debris Free Shield



2707 SATSUMA DRIVE  
 DALLAS, TX 75229  
 PH: 214.350.0591  
 FX: 214.350.0594  
 WWW.TECHLIGHTUSA.COM