



Catalog Number	
Project	Type

FEATURES & SPECIFICATIONS

FEATURES — Compact, low-profile design in neutral finish. UL listed for damp locations & meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

CONSTRUCTION — Injection-molded, engineering-grade, 5VA flame retardant, high-impact, thermoplastic in white or black finish..

ELECTRICAL SYSTEM — Dual 120V/277V voltage. Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing. Long-life, maintenance-free, rechargeable NiCd battery. Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90-minute emergency illumination. Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.


MOUNTING — Surface mount via quick-connect back plate; fits most standard size junction boxes and snaps into place to make internal electrical connections. Conduit mount knockout on top of housing. Suitable for wall or ceiling mount.

ILLUMINATION — Long lasting, efficient ultra-bright white LEDs. High-performance chrome-plated metalized reflector and polycarbonate lens for optimal light distribution. Adjustable LED lamp heads provides optimal center-to-center spacing. Optional high-lumen heads are available for increased center-to-center spacing.

WARRANTY — Five Year Warranty on all electronics and housing. Batteries are pro-rated warranted for 5 years.



LED Emergency Light LR-1 SERIES

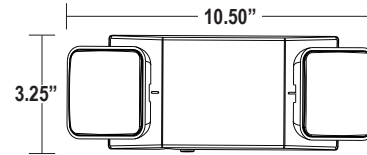

Series	Housing Height	Length & Width
LR-1	3.25"	10.50" x 3.50"

ORDERING INFORMATION

Choose the bold face options for the appropriate luminaire configuration for your application and enter on the line above each fixture attribute. Accessories may be factory installed, depending on the particular accessory chosen, but still be ordered as a separate line item.

LR-1					
Series	Housing Color	Options			
LR-1	W White B Black	SD	Self Diagnostic		
		H	High Output 12 LED Heads		

Example: **LR-1W**