




TECHLIGHT  
INNOVATION IN ILLUMINATION

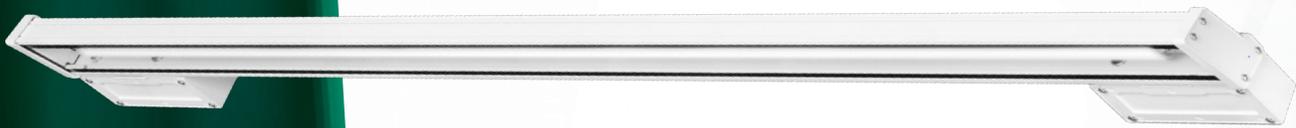

## LWW

LWW is designed for illuminating architectural surfaces and commercial signage. Designed for areas where limited accessibility due to fixture location or where heavy pedestrian or vehicle traffic makes maintenance difficult. The low-profile design provides application versatility with multiple mounting options; ground, wall and stem mounted applications.

### BENEFITS OF THE TECHLIGHT LWW SERIES:

- Available as single fixtures or custom lengths in increment of 1'
- A remote driver kit is provided for every 12' run
- Suitable for both up and down light applications
- Easy to join, install and maintain
- High performance LED system
- Increased energy efficiency
- Superb lumen maintenance
- Multiple color temperatures
- No hazardous materials
- Custom RAL color matching is available
- Operating temperature -40C to 50C
- CRI > 80
- ETL listed and wet location rated
- L70 ≥ 50K hours
- 0-10V Dimming
- Built-In Surge Suppression up to 10 kV
- Emergency Battery Available

Additional innovative, high performance products can be found at [www.techlight.com](http://www.techlight.com).



TECHLIGHT  
INNOVATION IN ILLUMINATION



## ORDERING INFORMATION - available as single fixtures or custom lengths in increment of 1'



### SERIES

**LWW1** 1' Linear LED  
Sign Lighter / Wall Wash

### COLOR TEMPERATURE

**40** Neutral White (4000K)  
**50** Cool White (5000K)

### NOMINAL LUMEN LM/FT

**1L** 1000 Lumens  
**25L** 2500 Lumens

### OPTICS

**LWG** Linear Wall Grazer

### VOLTAGE

**1** Multi-Volt (90V~300V)

### FINISH

**BK** Black  
**BZ** Bronze  
**AA** Anodized Aluminum  
**WH** White  
**SP** Special

### STEM LENGTH

**6** 6" Stem  
**12** 12" Stem  
**18** 18" Stem  
**24** 24" Stem

### OPTIONS

**SBF** Slow-Blow Fusing



### SERIES

**LWW2** 2' Linear LED  
Sign Lighter / Wall Wash

### COLOR TEMPERATURE

**40** Neutral White (4000K)  
**50** Cool White (5000K)

### NOMINAL LUMEN LM/FT

**1L** 1000 Lumens  
**25L** 2500 Lumens

### OPTICS

**LWG** Linear Wall Grazer

### VOLTAGE

**1** Multi-Volt (90V~300V)

### FINISH

**BK** Black  
**BZ** Bronze  
**AA** Anodized Aluminum  
**WH** White  
**SP** Special

### STEM LENGTH

**6** 6" Stem  
**12** 12" Stem  
**18** 18" Stem  
**24** 24" Stem

### OPTIONS

**SBF** Slow-Blow Fusing



### SERIES

**LWW4** 4' Linear LED  
Sign Lighter / Wall Wash

### COLOR TEMPERATURE

**40** Neutral White (4000K)  
**50** Cool White (5000K)

### NOMINAL LUMEN LM/FT

**1L** 1000 Lumens  
**25L** 2500 Lumens

### OPTICS

**LWG** Linear Wall Grazer

### VOLTAGE

**1** Multi-Volt (90V~300V)

### FINISH

**BK** Black  
**BZ** Bronze  
**AA** Anodized Aluminum  
**WH** White  
**SP** Special

### STEM LENGTH

**6** 6" Stem  
**12** 12" Stem  
**18** 18" Stem  
**24** 24" Stem

### OPTIONS

**SBF** Slow-Blow Fusing

## PERFORMANCE DATA

### LWW1

Nominal Lumen Im/ft	System Watt-age	Driver Loca-tions	Amperage Draw			
			120V	277V	240V	277V
1000L	7W	REMOVED	0.06A	0.04A	0.03A	0.03A
2500L	13W	REMOVED	0.11A	0.06A	0.05A	0.04A

### LWW2

Nominal Lumen Im/ft	System Watt-age	Driver Loca-tions	Amperage Draw			
			120V	277V	240V	277V
1000L	15W	REMOVED	0.13A	0.07A	0.07A	0.05A
2500L	26W	REMOVED	0.22A	0.13A	0.11A	0.09A

### LWW4

Nominal Lumen Im/ft	System Watt-age	Driver Loca-tions	Amperage Draw			
			120V	277V	240V	277V
1000L	29W	REMOVED	0.25A	0.14A	0.13A	0.11A
2500L	53W	REMOVED	0.44A	0.26A	0.22A	0.18A

