



Catalog Number	
Project	Type

FEATURES & SPECIFICATIONS



POLE — The pole shaft is fabricated from hot rolled carbon steel having a minimum yield of 46,000 PSI and conforms to ASTM A500 grade C requirements. The shaft construction is a single piece of formed steel welded longitudinally. The hand hole is located 1' 6" above the pole base. A ground lug is provided standard.

FINISH — A Super Durable Polyester powder coat finish is electrostatically applied in our state of the art paint facility. Standard colors available: Black, Bronze, US Green, White. Custom colors available upon request. Galvanizing treatments available upon request. Additional warranty extensions available with these treatments.

25' Steel 5" Square 7 Gauge Direct Burial Pole SSPDB SERIES



Mounting Options



Drilling Locations


Sides	A	B	C	D
Hand Hole	X			
DM1	X			
DM290	X	X		
DM2180		X		X
DM390	X	X		X
DM490	X	X	X	X

Technical Data

Nominal Pole Height	25'-0" Above Grade
Shaft Dimensions	30' x 5"
Wall Gauge	7 Gauge
Est. Shipping Weight	375 lbs

Max EPA (1.3 Gust)

90 mph	17.3
100 mph	12.8
110 mph	9.4
120 mph	6.8
130 mph	4.8
140 mph	3.2
150 mph	1.9



ORDERING INFORMATION

Choose the bold face options for the appropriate pole configuration for your application and enter on the line above each pole attribute. Accessories may be factory installed, depending on the particular accessory chosen, but must still be ordered as a separate line item.

Example: **SSPDB 25 5 7 GLVPBZ T238 NA**

(NA) is factory default for below grade drilling, unless otherwise specified in the ordering nomenclature under "Incoming Power".

Series	Pole Height	Pole Size	Pole Gauge	Color	Mounting	Drill Pattern	Incoming Power
SSPDB	25 25' Nominal	5 5" Round	7 7 Gauge	GLV¹ Galvanized GLVPBK Galvanized and Painted Black GLVPBZ Galvanized and Painted Bronze GLVPWH Galvanized and Painted White GLVPGR Galvanized and Painted US Green SP Special	DM1 Drill One Side DM290 Drill 2 Sides at 90° DM2180 Drill 2 Sides at 180° DM390 Drill 3 Sides at 90° DM490 Drill 4 Sides at 90° T238 2-3/8" OD Tenon (Standard) T278 2-7/8" OD Tenon T312 3-1/2" OD Tenon ND No Drilling	Blank None - for Tenon Mounting SSA SSA Drill Mount Pattern VSA VSA Drill Mount Pattern	NA No factory preparations AHxx² 1" Wiring Access Hole TC34xx² 3/4" NPT Threaded Conduit Entry PHHxx² Extra Hand Hole

NOTES

- For 'Galvanized and Painted' option. You must specify a paint color code as the suffix in addition to the GLVP coating option. (Example: GLVPBZ).
- Please note location when ordering. For 1st "x", specify height above base of pole. For 2nd "x", specify orientation from hand hole (A, B, C, D). Example: AH2C = Access Hole 2" Above Base, C Side. See Drilling Locations diagram for location designations.
- See Page 2 for details.
- BABA Compliant:** Ensures all steel and components are U.S.-sourced and includes full compliance documentation (self-certification and mill certifications). May affect pricing and lead time.

Options

(Include in Pole Ordering String Above)

TLGFIA	Ground Fault Receptacle
AVD25³	Poles Anti Vibration Device
BABA⁴	Build America, Buy America Act Compliant



Techlight
2009 McKenzie Drive Suite 110, Carrollton, TX 75006
PH: 214.350.0591 techlight@techlight.com


www.techlight.com

SSPDB SERIES 25' Steel 5" Square 7 Gauge Direct Burial Pole


AVD25 - Anti vibration device for 25ft pole

PN#	Pole Height(ft)	CHAIN LENGTH (ft)
AVD25	25	16.5

Square Pole Representation is similar to Round Poles.

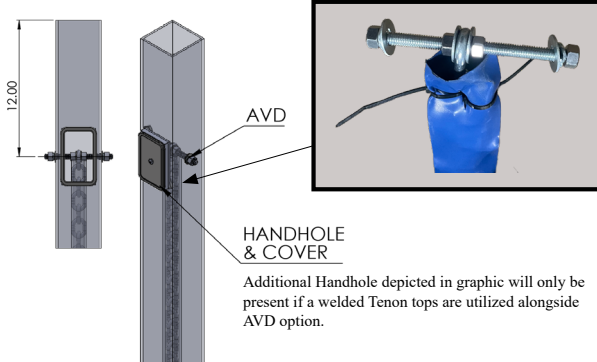

TL-GFIA - Ground Fault Receptacle

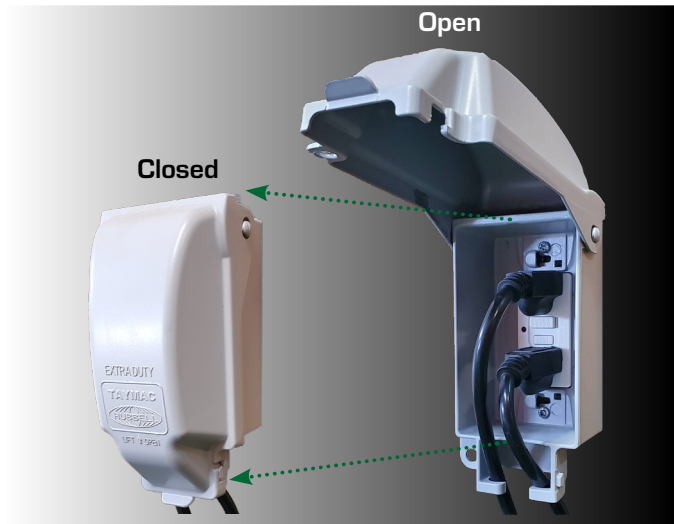

The GFIA (Ground Fault Circuit Interrupter) comes with a die cast aluminum in-use cover.

For Reference Only: The ASCE 7 Hazard Tool is the official source of information for pole selection when identifying wind speed zone limits within North America.

<https://ascehazardtool.org/>