TECHLIGHT

Catalog Number	
Project	Type

FEATURES & SPECIFICATIONS

POLE — The pole shaft is fabricated from hot rolled carbon steel having a minimum yield of 50,000 PSI and conforms to ASTM A500 grade C requirements. The shaft construction is a single piece of formed steel welded longitudinally. The hand hole is located 1' above the pole base. A ground lug is provided standard.

ANCHOR BASE — The anchor base is fabricated from a structural quality hot rolled carbon steel plate that has a minimum yield strength of 36,000 PSI. The anchor base telescopes the pole shaft and has a circumferential weld on the top and bottom.

BASE COVER — A full base cover is provided which encapsulates the base plate and anchor bolts to provide a clean transition from pier to pole.

FINISH — A Super Durable Polyester powder coat finish is electrostatically applied in our state of the art paint facility. Standard colors available: Black, Bronze, US Green, White. Custom colors available upon request. Galvanizing treatments available upon request. Additional warranty extensions available with these treatments.

30' Steel 6" Square 7 Gauge Pole

SSP SERIES

For detailed dimensions and base plate configurations, scan QR code or for engineering drawings or visit link below:

https://techlight.com/pdf/TL~POLESSP~SSP3067~DIMS.pdf

Technical Data

Nominal Pole Height	30'-0"
Shaft Dimensions	30' x 6"
Wall Gauge	7 Gauge
Bolt Circle	**Nominal** 13.0" **Range** 12.00"–14.00"
Bolt Size	1" x 36" x 4"
Base Plate Dimensions	13.0" sq. x 1.0" thk.
Est. Shipping Weight	521 lbs

Max EPA (1.3 Gust)

90 mph	18.4
100 mph	13.1
110 mph	9.1
120 mph	6.1
130 mph	3.8
140 mph	1.9
150 mph	0.5

Wider bolt circle flexibility + backward compatibility

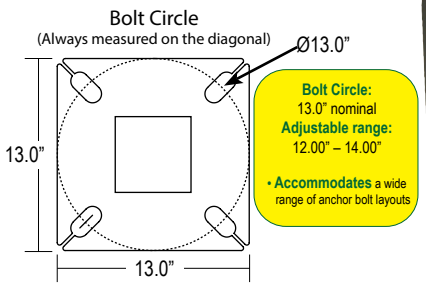

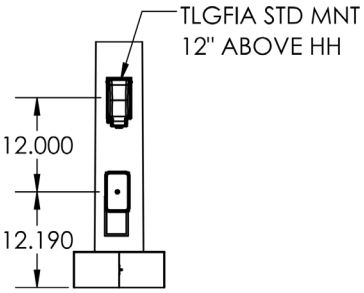

Mounting Options





Drilling Locations

Sides	A	B	C	D
Hand Hole	X			
DM1	X			
DM290	X	X		
DM2180		X		X
DM390	X	X		X
DM490	X	X	X	X

ORDERING INFORMATION

Example: **SSP 30 6 7 GLVPBZ T238**

Choose the bold face options for the appropriate pole configuration for your application and enter on the line above each pole attribute. Accessories may be factory installed, depending on the particular accessory chosen, but must still be ordered as a separate line item.

SSP ____ ____ ____ ____ ____ ____ ____

Series	Pole Height	Pole Size	Pole Gauge	Color	Mounting	Drill Pattern
SSP	**30** 30' Nominal	**6** 6" Square	**7** 7 Gauge	**BK** Black **BZ** Bronze **WH** White **GR** US Green **GLV** Galvanized **GLVP**[1] Galvanized and Painted **SP** Special	**DM1** Drill One Side **DM290** Drill 2 Sides at 90° **DM2180** Drill 2 Sides at 180° **DM390** Drill 3 Sides at 90° **DM490** Drill 4 Sides at 90° **T238** 2-3/8" OD Tenon (Standard) **T278** 2-7/8" OD Tenon **T312** 3-1/2" OD Tenon **ND** No Drilling	**Blank** None - for Tenon Mounting **SSA** SSA Drill Mount Pattern **VSA** VSA Drill Mount Pattern

NOTE: ANCHOR BOLT KITS MUST BE ORDERED AS A SEPARATE LINE ITEM. EACH KIT IS PROVIDED WITH A RIGID TEMPLATE FOR INSTALLATION. SEE ACCESSORIES FOR KIT PART NUMBERS. PLEASE NOTE ON PURCHASE ORDER IF ANCHOR BOLTS AND TEMPLATES ARE TO BE PRE-SHIPPED.

Options

(Include in Pole Ordering String Above)

TLGFIA	Ground Fault Receptacle
PHH[2]	Additional Hand Hole
AVD30[3]	Poles Anti Vibration Device
BABA[4]	Build America, Buy America Act Compliant

Accessories

(Order as separate line items)

KAB136G13R	AB Kit (4) 1" x 36" Galvanized Bolts and Rigid Template
KAB136G13RUSA	USA Anchor Bolt Kit part for the Anchor Bolts+Template

NOTES
1. For 'Galvanized and Painted' option. You must specify a paint color code as the suffix in addition to the GLVP coating option. (Example: GLVPBZ).
2. Please note location for additional hand hole when ordering. See Drilling Locations diagram for location designations.
3. See Page 2 for details.
4. **BABA Compliant**: Ensures all steel and components are U.S.-sourced and includes full compliance documentation (self-certification and mill certifications). May affect pricing and lead time.

Techlight
2009 McKenzie Drive Suite 110, Carrollton, TX 75006
PH: 214.350.0591 EMAIL: Techlight@techlight.com

www.techlight.com

All dimensions and specifications are subject to change without notice.

SSP SERIES 30’ Steel 6” Square 7 Gauge High EPA Reinforced Pole

Accessories (Order as separate line items)

AVD30 - Anti vibration device for 30ft pole

PN#	Pole Height(ft)	CHAIN LENGTH (ft)
AVD30	30	20

Square Pole Representation
is similar to Round Poles.

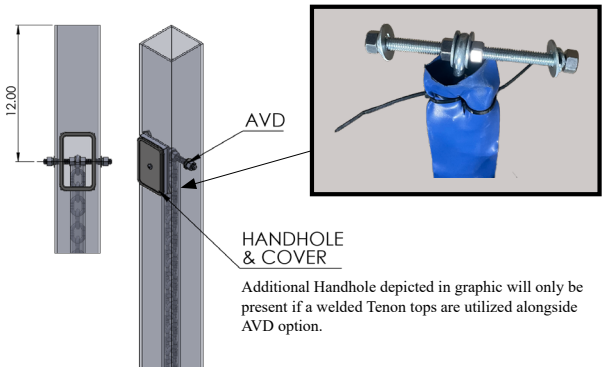

Additional Handhole depicted in graphic will only be present if a welded Tenon tops are utilized alongside AVD option.

TL-GFIA - Ground Fault Receptacle

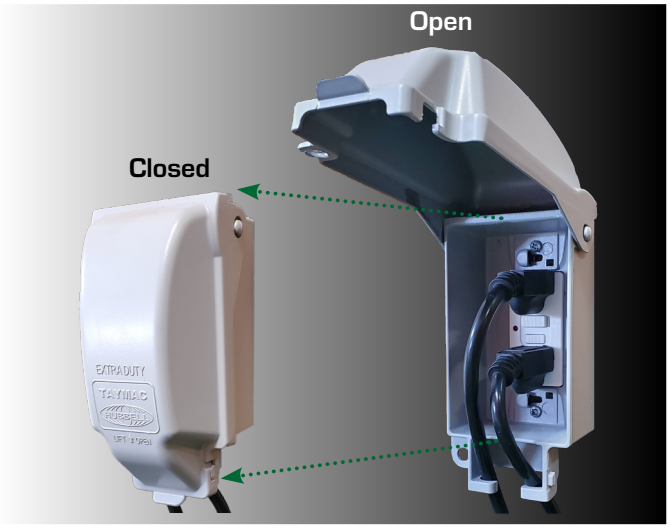

The **GFIA** (*Ground Fault Circuit Interrupter*) comes with a die cast aluminum in-use cover.

For Reference Only: The ASCE 7 Hazard Tool is the official source of information for pole selection when identifying wind speed zone limits within North America.

https://ascehazardtool.org/

Techlight
2009 McKenzie Drive Suite 110, Carrollton, TX 75006
PH: 214.350.0591 techlight@techlight.com

All dimensions and specifications are subject to change without notice.