



Catalog Number	
Project	Type

FEATURES & SPECIFICATIONS

FEATURES — Provides 11W of remote wattage. Energy-efficient LED technology. EZ snap-out chevron direction indicators. UL listed for damp locations & meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

CONSTRUCTION — Injection-molded, engineering-grade, V-0 flame retardant, high-impact, thermoplastic in white or black finish.

ELECTRICAL SYSTEM — Dual 120V/277V voltage. Charge rate/power “ON” LED indicator light and push-to-test switch for mandated code compliance testing. LVD (low voltage disconnect) prevents battery from deep discharge. 6V, 4.5Ah, sealed lead acid, maintenance-free, rechargeable battery. Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination. Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING — Universal surface mount, wall or ceiling, with EZ-snap thermoplastic mounting canopy, which snaps into place making installation quick & easy.


ILLUMINATION — Ultra-bright, energy efficient, long-life Red or Green LED. Offers 11W of remote capability

WARRANTY — Five Year Warranty on all electronics and housing. Batteries are pro-rated warranted for 5 years.



Remote Capable LED Exit Sign

RLE SERIES

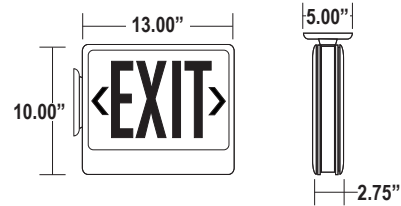

Series	Housing Height	Length & Width
RLE	10.00"	13.00" x 2.75"

ORDERING INFORMATION

Choose the bold face options for the appropriate luminaire configuration for your application and enter on the line above each fixture attribute. Accessories may be factory installed, depending on the particular accessory chosen, but still be ordered as a separate line item.

RLE					
Series	Letter Color	Number of Faces	Housing Color	Battery	Options
RLE	R Red G Green	2 Double Face	W White B Black	RC Remote Capable	SD Self Diagnostic HT Internal Heater

Example: **RLER2WRC**