



Catalog Number

Project

Type

FEATURES & SPECIFICATIONS

APPLICATION — The UPS Series Pole Side Arm Fitters provide a secure and economical mounting solution for Techlight side-arm lighting assemblies and accessories. Featuring a streamlined non-gusseted design, the UPS Series offers reliable support for a wide range of standard pole-mounted lighting applications while maintaining installation simplicity. Available in single and double arm configurations, the UPS Series is well suited for commercial, industrial, municipal, and area lighting installations requiring a dependable mounting interface between the lighting arm assembly and pole-mounted tenon.


CONSTRUCTION — The UPS Series is fabricated from heavy-duty steel and engineered to provide a durable mounting solution for outdoor lighting applications. The streamlined non-gusseted construction offers a practical and economical design while maintaining the strength and reliability required for standard-duty installations. Precision-fabricated components and welded construction ensure a secure connection between the side-arm assembly and supporting pole tenon.

MOUNTING — The UPS Series utilizes a slip-fit mounting sleeve for secure attachment to a 2-3/8" O.D. pole tenon. Available in 36" and 48" arm lengths, each assembly is secured using stainless steel set screws to facilitate proper installation and alignment.

FINISH — A durable powder coat finish is applied to provide long-lasting protection in outdoor

UPS SERIES

Non-Gusseted Pole Side Arm Fitter

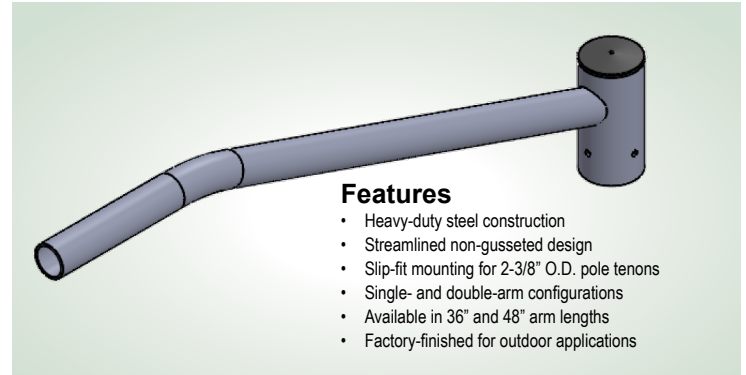

Features

- Heavy-duty steel construction
- Streamlined non-gusseted design
- Slip-fit mounting for 2-3/8" O.D. pole tenons
- Single- and double-arm configurations
- Available in 36" and 48" arm lengths
- Factory-finished for outdoor applications

SERIES	TENON HEIGHT	ARM LENGTH
UPS	17.00"	36" or 48"

environments. Black is standard. Additional custom colors and finishes are available upon request to coordinate with Techlight pole systems and project requirements.

WARRANTY — The complete assembly is covered by Techlight's standard limited warranty.

ORDERING INFORMATION

Choose the bold face options for the appropriate luminaire configuration for your application and enter on the line above each fixture attribute. Accessories may be factory installed, depending on the particular accessory chosen, but still be ordered as a separate line item.

EXAMPLE:

UPS-190-48-T238-BZ

UPS		-		
SERIES	CONFIGURATION	ARM LENGTH	TENON SIZE	FINISH
NON-GUSSETED UPSWEEP ARM ASSEMBLY FOR STANDARD-DUTY POLE-MOUNTED LIGHTING	190 = 1 Arm @ 90° 2180 = 2 Arms @ 180°	36 = 36" Arm Length 48 = 48" Arm Length	T238 = 2-3/8" O.D.	BK = Black BZ = Bronze GR = US Green WH = White SP = Special GLVP¹ = Galvanized & Painted

NOTES


¹ = For 'Galvanized and Painted' option. You must specify a paint color code as the suffix in addition to the GLVP coating option. (Example: GLVPBZ).

EFFECTIVE PROJECTED AREA (EPA)


Catalog Number	Configuration	EPA (ft²)
UPS190-48	1 Arm @ 90°	0.60
UPS2180-48	2 Arms @ 180°	1.19

EPA values shown are for the side arm assembly only and do not include fixture EPA.

DIMENSIONS

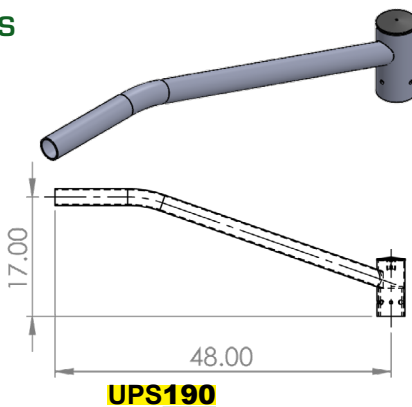

UPS190

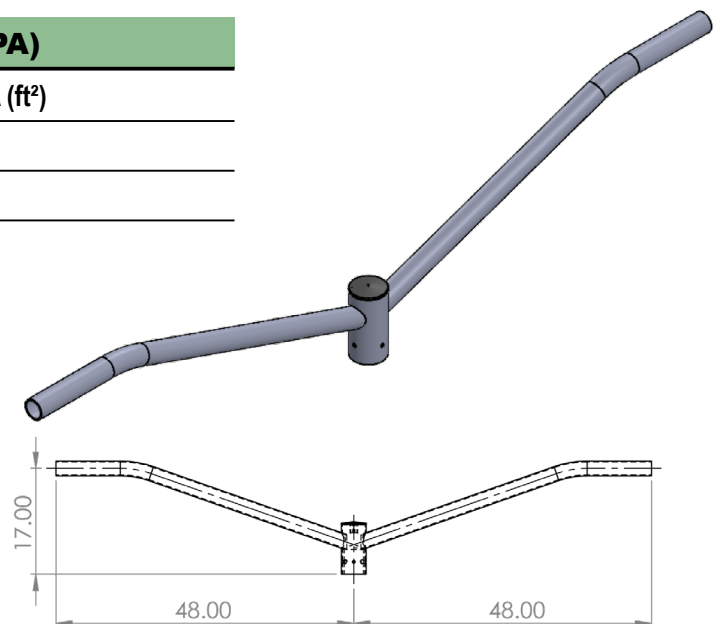

UPS2180

