TECHLIGHT
INNOVATION IN ILLUMINATION

CBB SERIES

CBB Low Voltage
Composite Burial Enclosure

Catalog Number	
Project	Type

SERIES	LENGTH HEIGHT & WIDTH
CBB	12”L x 7.5”W x 3”H

FEATURES & SPECIFICATIONS

CONSTRUCTION — Made from a compression molded, fiberglass reinforced polyester composite housing. It is resistant to rust, corrosion, oils, gasoline, and detergents. Provided with a 600W Low Voltage transformer that is fully encapsulated. Comes standard with junction compartment and anti-siphon barrier. Corrosion resistant stainless steel hardware. Dark Bronze finish is standard on the burial box. ETL rated for wet locations.

MOUNTING — Mount composite burial enclosure in excavated hole with allowance for a minumum of 3” backfill. Two 3/4” NPT and two 1/2” NPT conduit entries are provided. Flexible conduit (not provided) is recommended for connections to aid in fixture placment/adjustment. Housing cover is fully gasketed to provide a water tight seal.

ELECTRICAL SYSTEM — Housing is prewired with high temperature wire. Silicone filled, waterproof wire nuts and potting compound are provided for installation. 120V input / 12V output. Total wattage varies based on model type.

FINISH — A Super Durable Polyester powder coat finish is electrostatically applied in our state-of-the-art paint facility. Standard colors available: Black, Bronze, US Green, White. Custom colors available upon request.

LISTINGS — ETL listed for wet locations.

WARRANTY — The complete luminaire is covered by a 5-year limited warranty.

ORDERING INFORMATION

Choose the bold face options for the appropriate luminaire configuration for your application and enter on the line above each fixture attribute. Accessories may be factory installed, depending on the particular accessory chosen, but still be ordered as a separate line item.

EXAMPLE:
CBB19

PART NUMBER	DESCRIPTIONS
CBB19	150W 120V/12V LOW VOLTAGE ENCLOSURE
CBB20	300W 120V/12V LOW VOLTAGE ENCLOSURE
CBB22	600W 120V/12V LOW VOLTAGE ENCLOSURE

DIMENSIONS

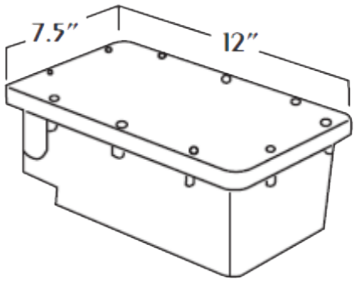

Estimate Shipping Weight: 16 lbs

ACCESSORIES

TLHB800RCH
Digital Timer

P20000PC-LVENC
Photocell (DC Transformer Operation Only)

PCCORD-6 6’ Photocell Extension Cord
PCCORD-8 8’ Photocell Extension Cord

2009 Mckenzie Drive Suite 110 I Carrolton, TX 75006 I PH: 800.225.0727 www.techlight.com

All dimensions and specifications are subject to change without notice.